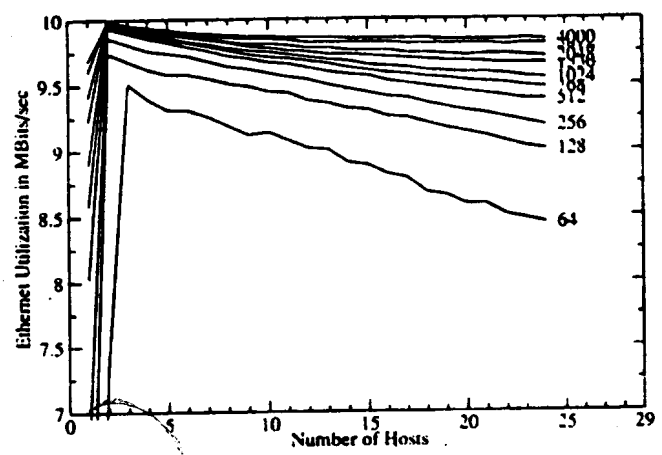
Ethernet Utilization in MBits/sec
Number of Hosts
4000
512
256
128
64

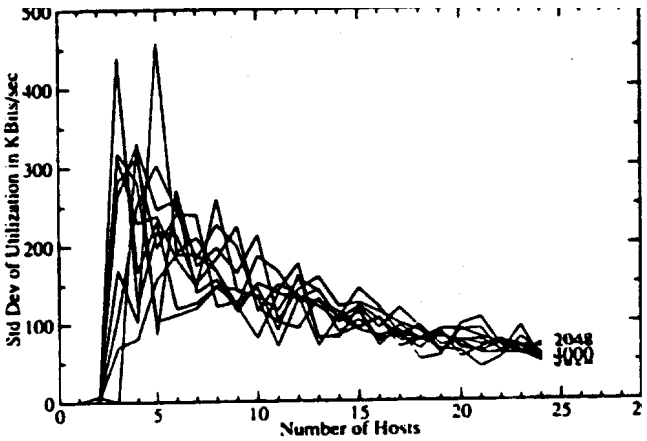
Std Dev of Utilization in KBits/sec
Number of Hosts
2048
3000

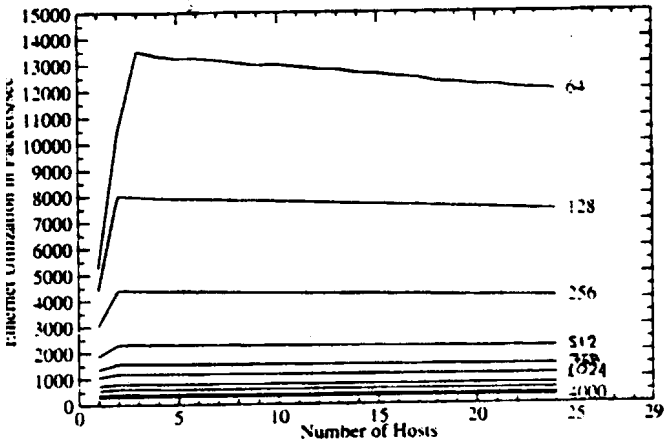
Number of Hosts
64
128
256
512

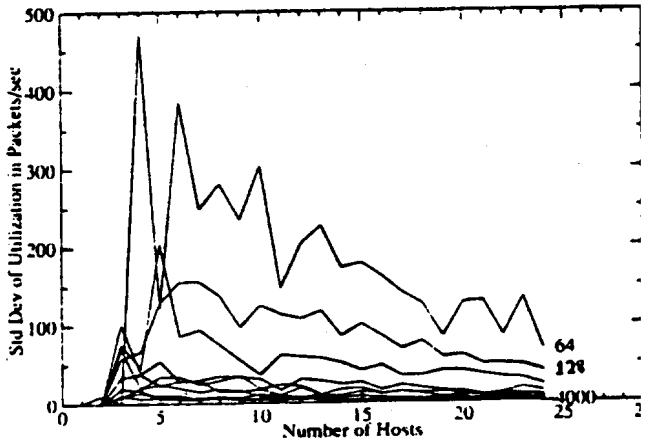
Std Dev of Utilization in Packets/sec
Number of Hosts
64
128

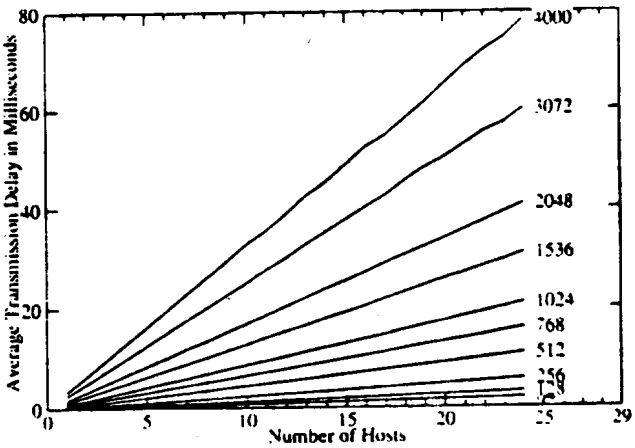
Average Transmission Delay in Milliseconds
Number of Hosts
4000
3072
2048
1536
1024
768
512
256

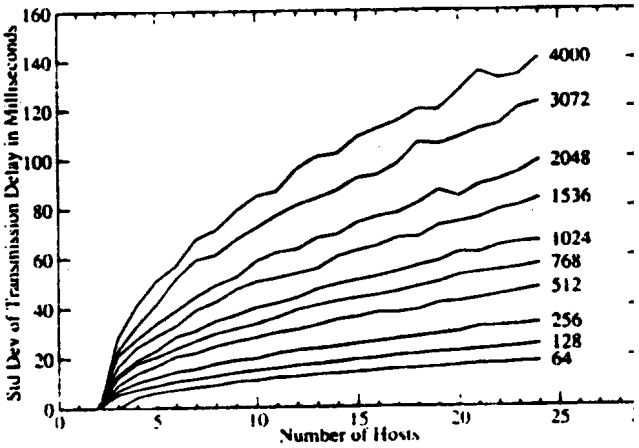
Std Dev of Transmission Delay in Milliseconds
Number of Hosts
4000
3072
2048
1536
1024
768
512
256
128
64